


POWER SUPPLY CONNECTION DIAGRAM
115 VAC, 60HZ

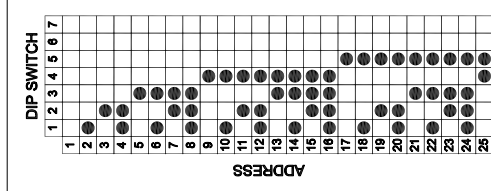

FCC Tested To Comply With FCC Standards
This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

ADDRESS []
DIP SWITCH [] OFF [] ON
QUICK ADDRESS CHART
REFER TO INSTRUCTION MANUAL FOR COMPLETE ADDRESS LISTING (1 thru 89)

- ELECTRICAL REQUIREMENTS:**
- 1) UNIT REQUIRES 115 VAC, 20 A, 60 HZ, SINGLE PHASE POWER. LOCATE A RECEPTACLE TO MATCH THE POWER SUPPLY CONNECTION WITHIN 5' OF THE UNIT.
 - 2) WHEN KEY SWITCH OPTION IS USED, THE SWITCH WIRING REQUIRES LOW VOLTAGE WIRE (24 V).
 - 3) LOCATE KEY SWITCH IN A LOCATION THAT WILL ALLOW THE OPERATOR TO HAVE FULL VIEW OF THE UNIT.
- UNIT MAY BE USED STAND ALONE WITH 25 STATION TRANSMITTER ONLY OR MAY BE USED IN CONJUNCTION WITH LOW VOLTAGE KEY SWITCH AND 25 STATION TRANSMITTER.
- REMOTE RECEIVER IS COMPATIBLE WITH 1194 HOIST, 4002 HOIST, 4003 HOIST, 4002SF HOIST, AND ALL ELECTRIC HEIGHT ADJUSTERS.

REVISION		
REV.	DATE	BY
A	04/16/08	RWP
B	07/11/11	WDC

Gared Holdings, LLC
9200 E. 146th St. Noblesville, IN 46060

THIS DOCUMENT CONTAINS TRADE SECRET AND OTHER MATERIALS WHICH ARE PROTECTED BY CONFIDENTIALITY NOTICE AND AGREEMENT AND BY COPYRIGHT. ANY USE OR COPYING OF THIS DOCUMENT EXCEPT AS AUTHORIZED BY GARED HOLDINGS, LLC IS STRICTLY PROHIBITED.

WIRELESS REMOTE RECEIVER W/KEY OPTION

DRAWN	CONNERLEY	DATE	03/15/05	MATERIAL	N/A
APPROVED	JJC	DATE	03/15/05	FINISH	N/A
FILE LOC. Q:\Final Release\Specifications				DWG. NO.	1199
SIZE	SCALE	SHT. NO.	PART NO.		REV
B	NONE	1 OF 1		1199	A



MODEL 1199

WIRELESS REMOTE CONTROL

APPLICATION

This unit designed to operate Model 1194 basketball hoist, Model 4002 curtain hoist, or Models 1170 and 1180 electric height adjusters by wireless remote control. This unit eliminates the need to run wiring for individual key switches. Each hoist shall be equipped with a 120 volt commercial receiver that can be coded for individual operation. Receiver shall be factory wired and attached to a metal enclosure that has a 3-1/2" pipe clamp for attachment to the overhead superstructure. Unit to have 4' power cord with a twist-lock grounded plug attached. Matching receptacle and cover to be mounted in 4" square box (by others.)

Wireless remote control operator can be used with key switch operation when required

Wireless remote control requires (1) model 1198 battery powered (standard 9-volt) hand held transmitter capable of operating up to twenty-five individual hoists. One transmitter provided per project. Additional transmitters are available to match facility requirements.

The model 1199 Wireless Remote Control (transmitter and receiver) are covered by a 2-year conditional warranty. Contact PSS or Gared Sports customer service for complete details on warranty.

All other electrical, junction and synchronizer boxes not mentioned above shall be furnished and installed by a certified electrical contractor. Follow manufacturer's instructions and all local safety codes.