


REAR VIEW

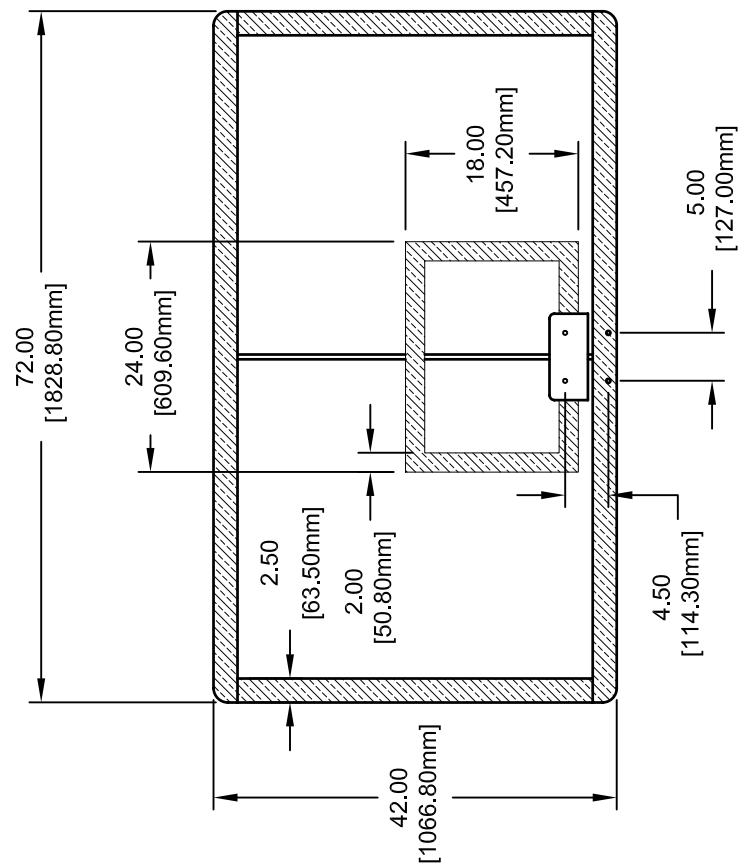

FRONT VIEW

NOTE:
 BACKBOARD THICKNESS - 2 3/8".
 MATERIAL - 1/2" THICK TEMPERED GLASS WITH ALUMINUM FRAME.

REVISION		
REV.	DATE	BY
A	12/18/06	JRM
B	06/06/08	RWP



Gared Holdings, LLC
 9200 E. 146th St. Noblesville, IN 46060

THIS DOCUMENT CONTAINS TRADE SECRET AND OTHER MATERIALS WHICH ARE PROTECTED BY CONFIDENTIALITY NOTICE AND AGREEMENT AND BY COPYRIGHT. ANY USE OR COPYING OF THIS DOCUMENT EXCEPT AS AUTHORIZED BY GARED HOLDINGS, LLC IS STRICTLY PROHIBITED.

OUTER LIMIT PRO BACKBOARD WITH STRUT				
DRAWN	CONNERLEY	DATE	05/02/03	MATERIAL AS NOTED
APPROVED	JJC	DATE	05/02/03	FINISH AS NOTED
FILE LOC.	Q:\Final Release\Specifications			DWG. NO. 3010RG
SIZE	SCALE	SHT. NO.	PART NO.	REV
A	NOTED	1 OF 1	3010RG	B



MODEL 3010RG

OUTER LIMIT PRO 72" X 42" RECTANGULAR GLASS BACKBOARD With Center Strut for Four Corner Mount

Backboard shall be fabricated with tubular extruded aluminum frame with added internal ribs for increased strength. The frame shall be welded into a solid unit to provide a rigid member for supporting the glass. Corners of frame shall be rounded. Backboard shall meet all professional, NCAA and high school requirements.

Backboard frame shall be available for four corner and center mounting. Key-slots are machined into the frame on standard mounting centers for corner mounting. A reinforcing center strut shall be used on the corner mount option to transfer load on the goal during play directly into the frame to relieve any stress on the glass.

Glass shall be ½" in thickness and fully tempered with the white target lines permanently fused onto surface. Glass shall be set into channel shaped vinyl cushion to insulate the glass from frame. Powder coated white cover strips shall be used to hold glass in place and form border around the front face of the board. Goal mounting holes shall be on 5" horizontal and 4 ½" vertical centers.

Backboard shall be covered by a lifetime warranty.

ACCESSORIES

GOALS

Compatible goals are models 20123T-B (Snap B), 3000, 2000+, and 1000. See goal section in specification manual.