



**Model: 7200**  
**Collegiate Volleyball System**



**Installation, Operation and Maintenance Instructions**

**Please read all instructions before attempting installation or operation of these units**

**SAVE THESE INSTRUCTIONS FOR FUTURE USE**

PUBLICATION No.  
6 0 1 7 5 4 0 7 7



## 7200 collegiate Volleyball System



### *Table of Contents*

<b><u>Section</u></b>	<b><u>PageNo.</u></b>
Introduction	2
Parts List by Sub-Assembly	2
Parts Checklist	3
Floor Sleeve Installation	4-5
Floor Cover Installation	6
Net Installation Instructions	7-9
Maintenance Check Sheet	10



## 7200 collegiate Volleyball System



### ***Introduction***

Thank you for your purchase of a Gared Sports model 7200 Collegiate Volleyball System. To ensure that our equipment will provide years of use to you, we are including this installation, operation, and maintenance guide. This guide will provide information on the proper assembly and installation methods, operating procedures, and preventative maintenance of your portable backstop.

Please note that a Bill of Materials is being included with this guide. Please check that all of the parts called out on the Bill of Materials are present prior to beginning assembly and setup. Please do not substitute for factory parts. Please contact the PSS or Gared Sports customer service department and allow them to determine if substitute parts are acceptable.

It is recommended that an individual who has been properly trained perform assembly and set up of the backstop. No one under the age of 18 should attempt assembly or set up of the unit, unless properly supervised.

To prevent normal wear and tear from shortening the life of the unit, preventative maintenance inspections and repairs should be performed at least once per year. If the units are subject to high or unusual usage, inspections should be scheduled to occur more frequently. If items are found to be nonconforming, replacements can be ordered from PSS or Gared Sports or one of our authorized dealers. When contacting PSS or Gared Sports, please have information regarding the dealer/installer who sold the unit, the name of the project, and any applicable warranty information.

### **Parts List by Sub-Assembly**

<b>Part Number</b>	<b>Description</b>	<b>Qty</b>
6252	CABLE COVER SET	1 EACH
6405	FLOOR SLEEVE 4.0" INSIDE DIA.	2 EACH
6410	NET ANTENNA & SIDELINE MARKER	1 PAIR
6430	6" BRASS FLOOR COVER	2 EACH
7210	COLLEGIATE UPRIGHT POST	1 EACH
7216	COLLEGIATE WINCH POST	1 EACH
601652115	VOLLEYBALL NET	1 EACH

Floor sleeves (6405) and floor covers (6430) are shipped early to be installed at the time of original construction. Posts are shipped fully assembled.



## Set-up Guide

### Parts Checklist

Verify all parts listed on packing list are present prior to installation.

### Floor Sleeves/Covers Plates (These may ship early and separately)

- Floor Sleeves  OK
- Cover Plates  OK

### Upright Posts (Refer to drawings or pictures in the instructions)

- End Post(s)  OK
- Winch Post(s)  OK

### Net/Cable Hardware

- Cable  OK
- Winch (es) & Hardware  OK
- Antenna(s)  OK
- Net(s)  OK

### Padding

- Upright Pads  OK
- Chain & Cable Covers  OK

### Optional Accessories


- Referee Stand  OK
- Equipment Cart  OK
- Storage Devices  OK




## Floor Sleeve Installation

1. Mark (2) spots on the floor exactly 36 feet apart (refer to most recent set of architectural prints for exact locations within the gym). These represent the CENTERS of each sleeve installation. If sleeves are to be more or less than 36 feet apart, contact a PSS or Gared representative for information regarding this alteration.
2. Cut (2) round holes through the playing surface 4-3/4" to 5" diameter centered on the spots marked in step one. (See page 5)
3. After cutting out the circle in the surface flooring, cut a similar hole in the concrete slab below. The diameter of this hole should be about 5"; however the size is not critical. The hole must be large enough to accommodate the sleeve at 3 degrees off vertical.
4. Cut or drill the hole completely through the concrete slab. Under the slab, hollow out (by hand) an area about 18-20" deep from the playing surface. (Refer to page 5)
5. A "non-shrink" grout should be used to anchor the sleeve. Pour the grout mixture into the hole until it is just below the BOTTOM of the concrete hole. Cover the sleeve during installation to prevent debris from falling in or grout from entering the bottom of sleeve.
6. Insert the 4-1/2" O.D. steel sleeve and work it down into the grout until the inside bottom of the sleeve is 14" below the TOP surface of the floor. Incorrect sleeve depth will result in a net height error. Also be aware that the sleeve must tilt 3° away from the court. The 3° will correct when the net is installed and tightened. (See details page 5)
7. Wait a minimum of (7) days to allow the grout to cure before setting up the posts.
8. **Note: A skilled woodworker will be needed for the following operation!**  
Using a router and template, make a counterbore 6-7/16" diameter by 9/16" deep centered over the original 5" hole in the floor, to receive the brass floor cover. A template can be made from a piece of Masonite or thick plastic. A template is needed to achieve a good and accurate cut. Many router and template combinations are possible. One example of a router and template combination is shown on page 6. A finished counterbore of 6-7/16" diameter is what is important! Practice on a piece of scrap wood first. If the hole is too big, corrections may not be possible!
9. Install the floor covers. Usually the covers are oriented to open outward away from the playing area. However, this is a matter of preference. Drill holes and insert screws as shown on page 6.

**Installation Instructions for Ground Sleeves**

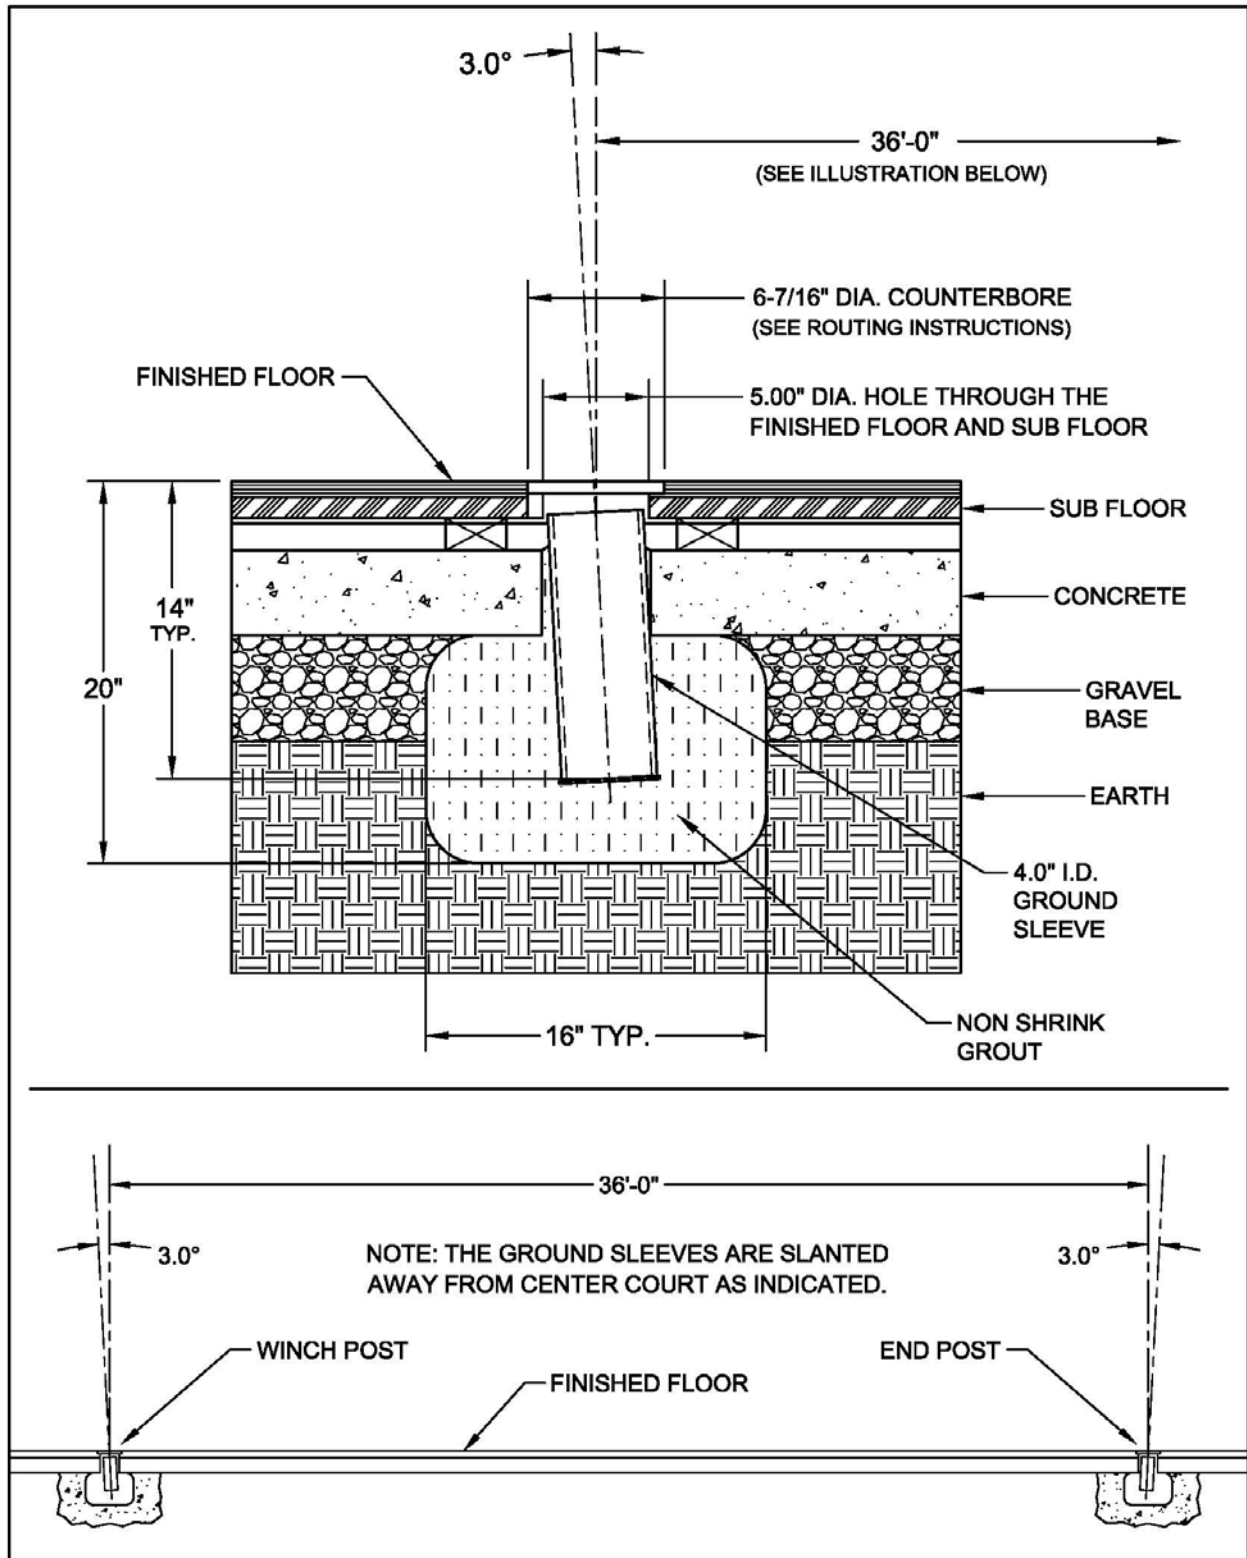


**Counterbore Details and Floor Cover Installation**

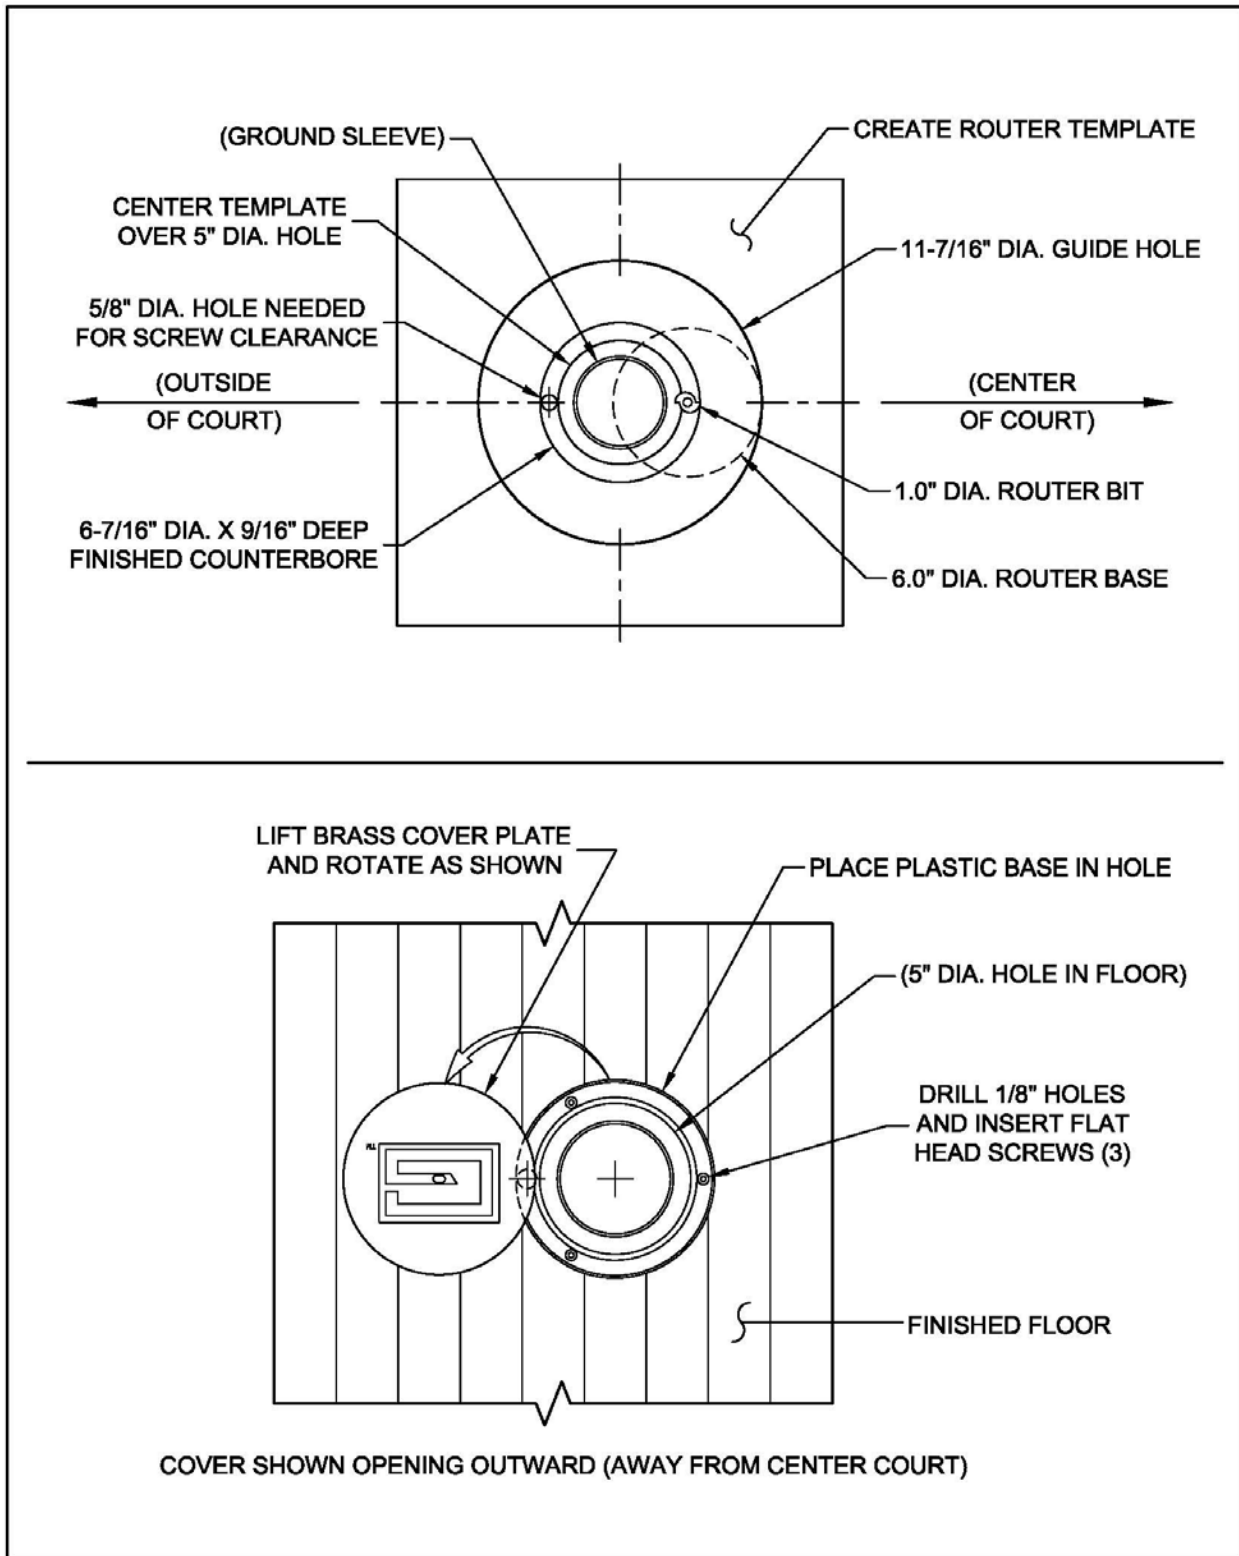


## Post and Net Installation Instructions


1. Lift and rotate the floor covers out of the way. Insert the **Winch Post** and **End Post**.
2. Lay out the net in the approximate position between the two posts.
3. Height of the net is set by adjusting the height of the slide rail attached to the winch post and end post. Release the **Cam Locks** on the posts and set the net cable attachment points approximately 3/4" higher than the desired net playing height. Reset the cam locks.
4. Rotate the winch handle counter clockwise to fully extend the belt. Attach the net cable to the belt with a snap link as shown on page 8. Attach the other end of the net cable to the top hook at the top of the end post.
5. Next, turn the winch handle clockwise to tighten the net cable. Center the net so that there is equal space between the ends of the net and the posts. Undo the Velcro net straps as they come shipped with the net. Wrap the straps through the footman's loop as shown in the illustration at the bottom of this page. Pull the straps tight and press the Velcro surfaces together. These straps are responsible for maintaining the net tension and may need to be retightened periodically. Expect stretch in the net.
6. The height of the net will vary with the tightness of the cable. If the net height needs to be adjusted, loosen the cable by unwinding the winch to take pressure off of the side rails. Release the cam locks and move the rails to the desired height. Tighten the cam locks and retighten the net.

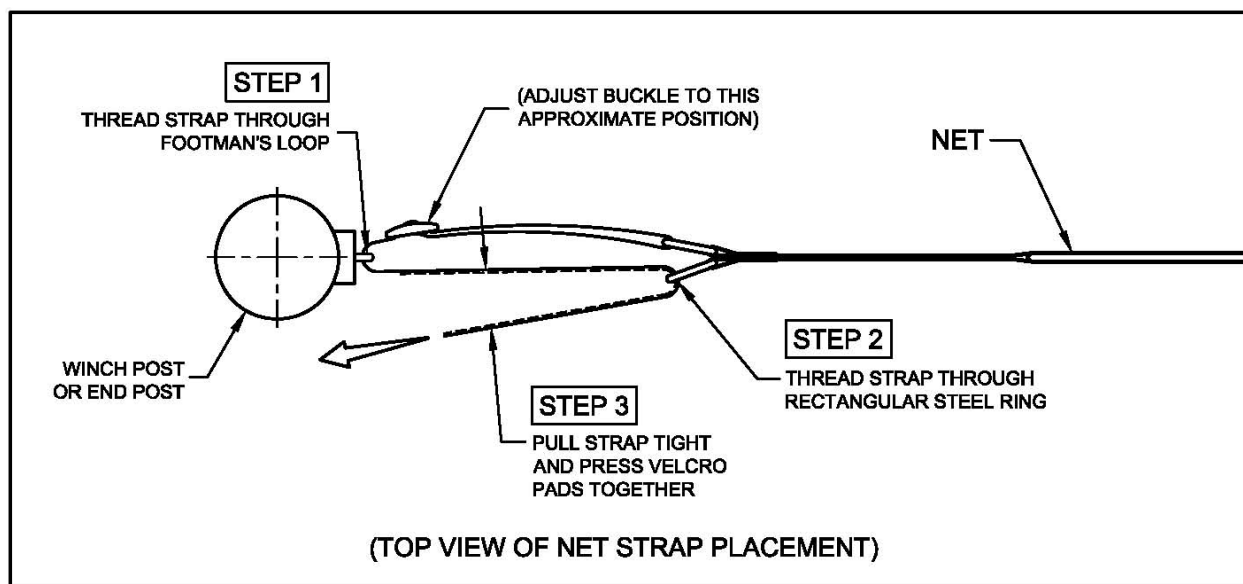

**Details – 7216 Winch Post with Net**

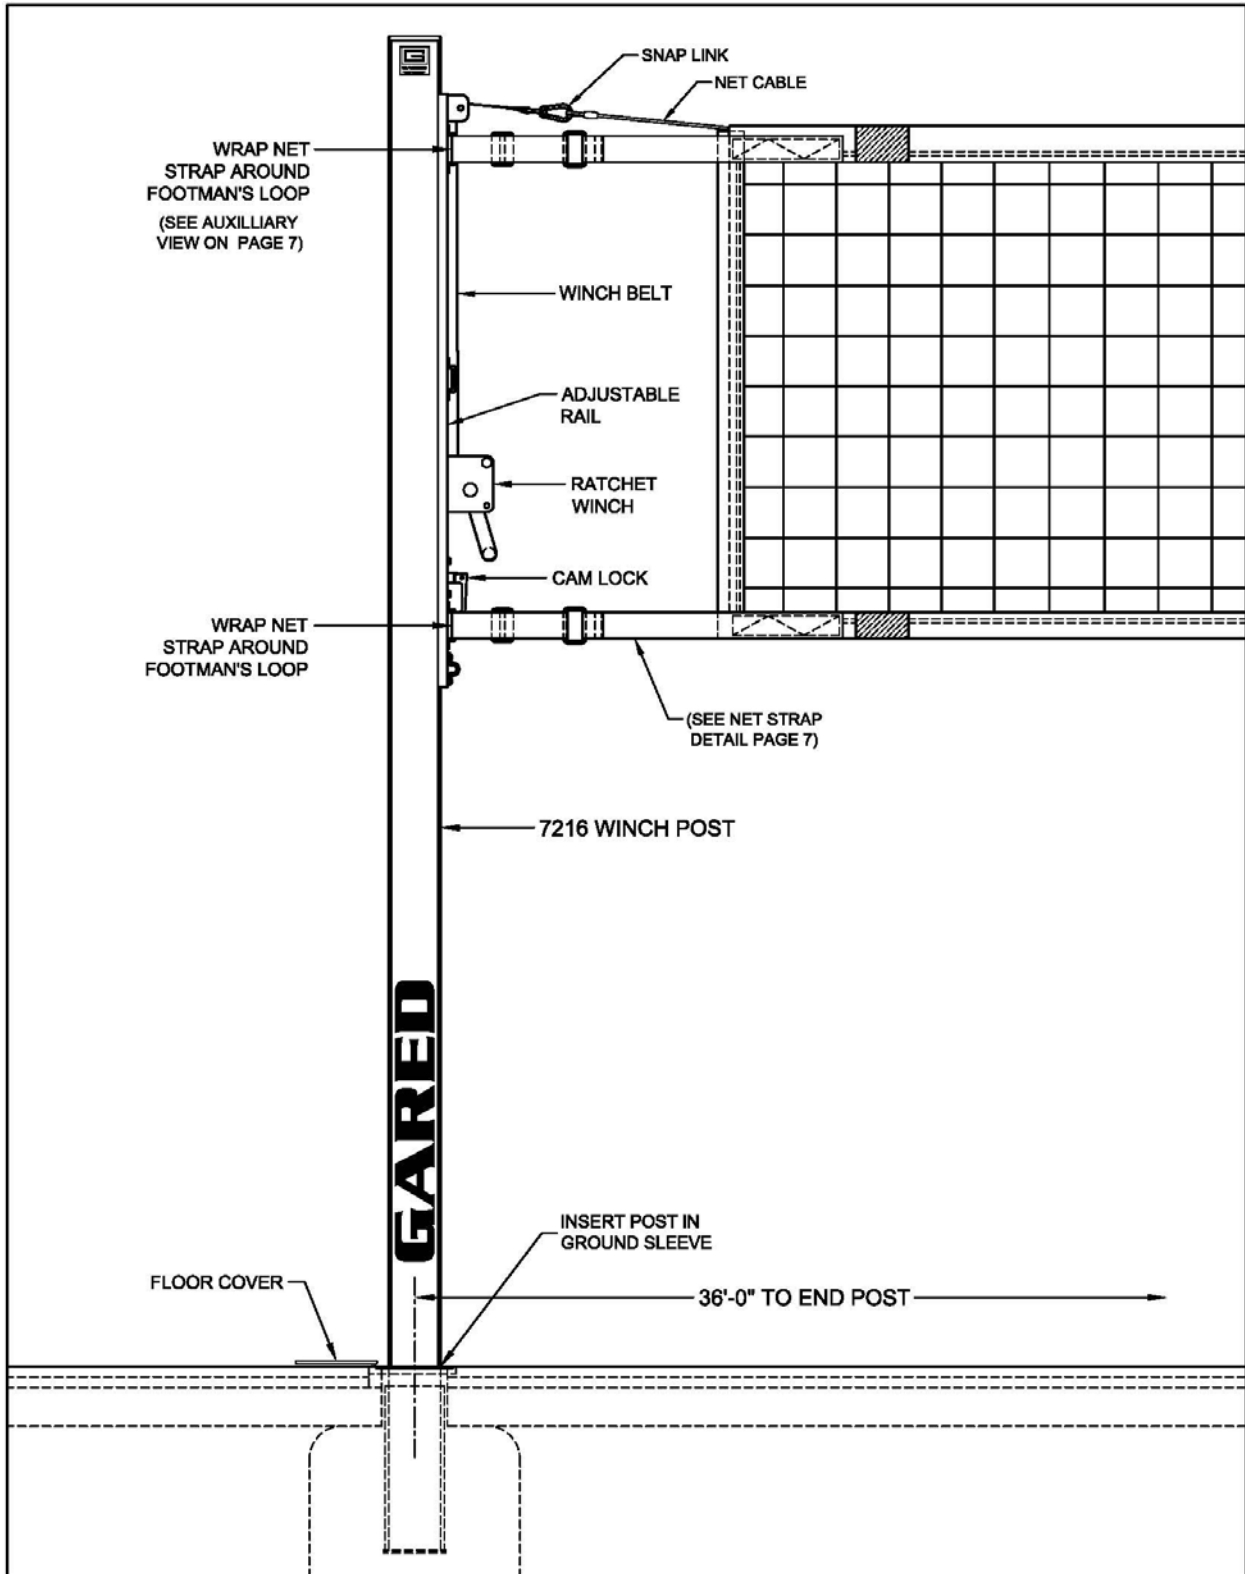

**Details – 7210 End Post with Net**

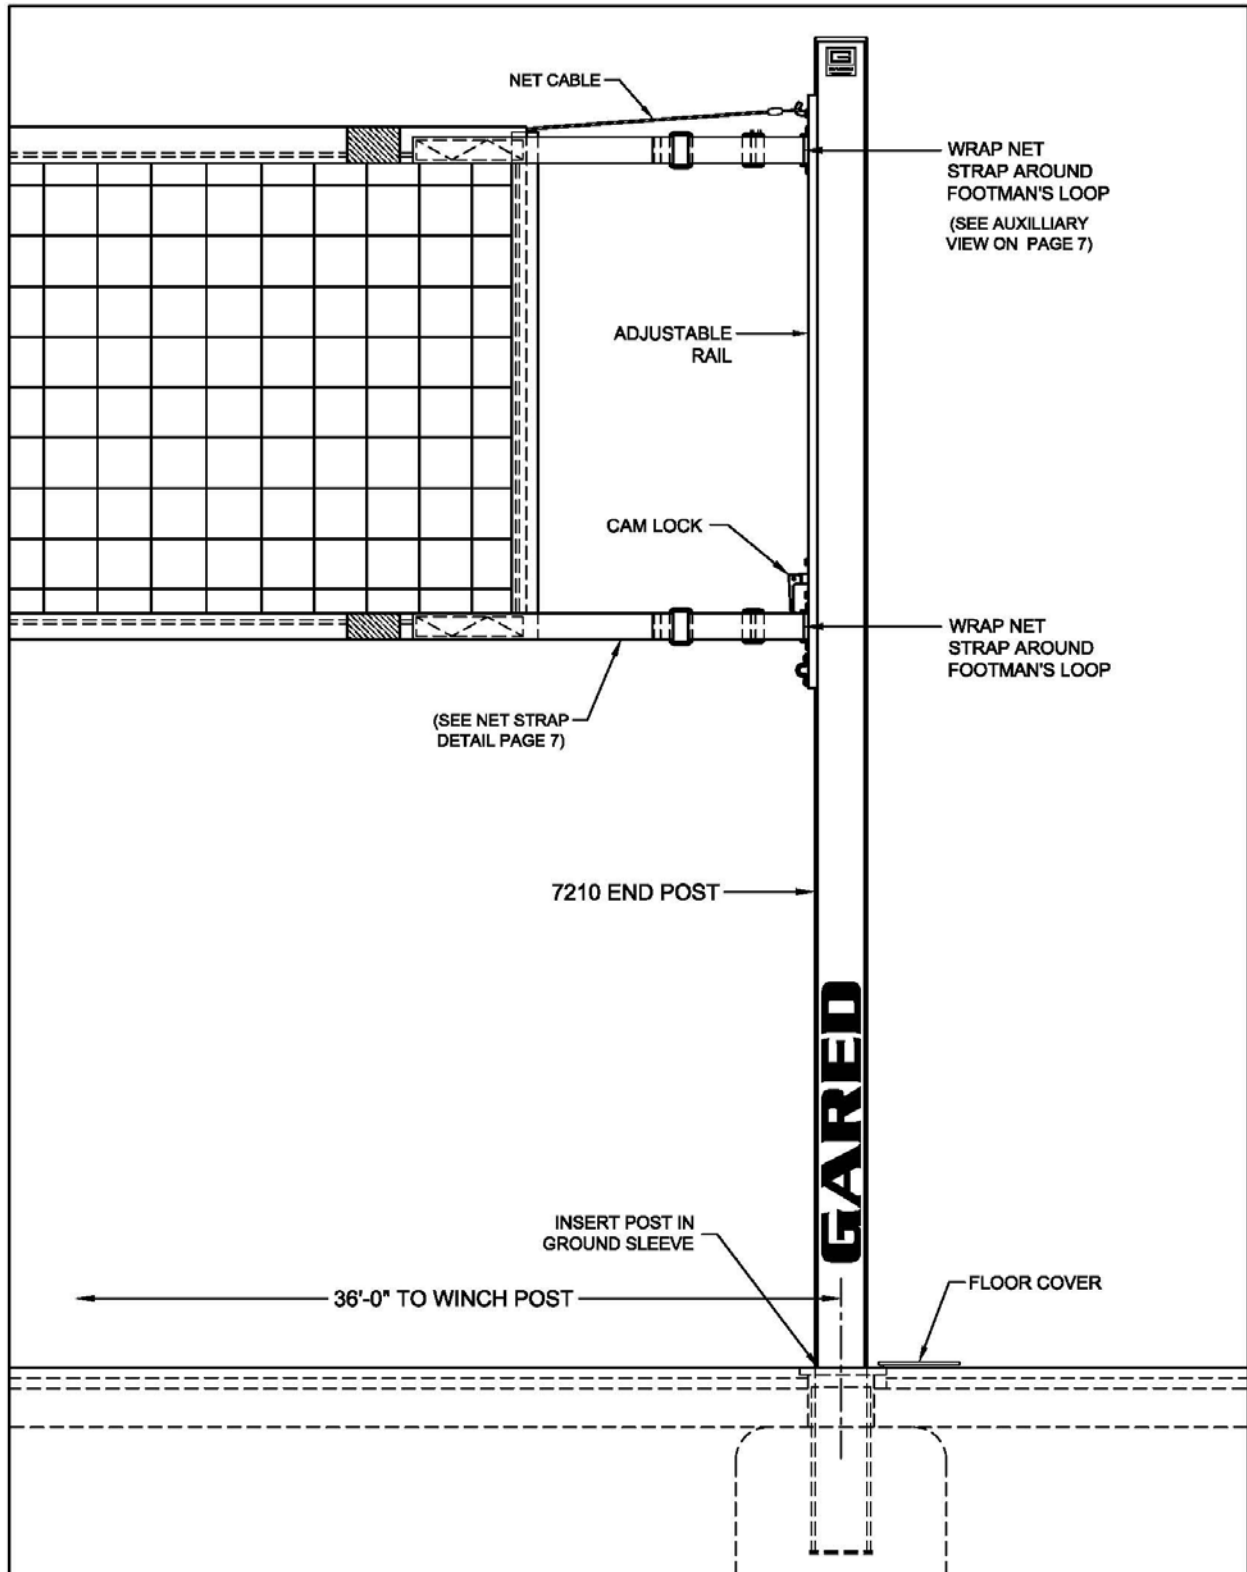



**Maintenance**

1. General inspection of equipment when used should be performed to ensure no catastrophic failures have occurred during the course of use between yearly inspections.
2. It is recommended that yearly inspections be conducted to determine if any bolts or any other hardware has become worn or loosened. A sample check sheet has been provided for you in this guide.
3. During yearly inspections, all moving parts should be inspected while in operation. Key points to look for include rotation points where bushings contact metal, winches, pulleys and quick links. The strap should be looked at for any degradation or fraying.
4. Any loose bolts or nuts should be tightened.
5. Check Sliding components and strap for wear.

**Maintenance Check Sheet**

Date: \_\_\_\_\_

Unit: \_\_\_\_\_.

**Anchors/Floor Sleeves**

- Anchors/bolts OK  Repair  Replace
- Floor sleeves/covers OK  Repair  Replace

**Unit Supports / Brackets / Hinges**

- Tubes; dents, stress spots, etc. OK  Repair  Replace
- Bolts; loose, deformed, etc. OK  Repair  Replace
- Brackets/Hinges; bent, not rotating, etc.  
OK  Repair  Replace

**Winch/Strap**

- Winch; binding, loose, etc. OK  Repair  Replace
- Hardware; Quick links OK  Repair  Replace

**Sliding Components**

- Locking Mechanisms OK  Repair  Replace

**Safety Padding**

- Velcro Function OK  Repair  Replace
- Vinyl Condition OK  Repair  Replace

Replacement parts and / or service to the equipment can be obtained from your local PSS or Gared dealer or installer. To find your local dealer, visit us online or contact customer service department at the web address or phone number listed on the last page of this manual.



**Gared Holdings, LLC**

**Performance Sports Systems  
9200 E. 146<sup>th</sup> Street  
Noblesville, IN 46060**

**800-848-8034  
[www.perfsports.com](http://www.perfsports.com)**

**Gared Sports  
707 North 2<sup>nd</sup> Street  
St. Louis, MO 63102**

**800-325-2682  
[www.garedsports.com](http://www.garedsports.com)**